


IMPROPER WEeping TILE TO SANITARY SANITARY SEWER CONNECTION

Weeping tile connecting to sewer services allow large amounts of storm water (entering from the weeping tile) to enter into the city's sanitary sewer mains. During heavy rain storm events, this can contribute to the surcharging of the city's sewer system, causing sewage to backup into basements.

Remedies include the installation of a sump pit (properly connected to the weeping tile), sump pump (properly discharging outside to a lawn area), the removal of the weeping tile connection to the floor drain, and the installation of a back-flow valve on the sanitary service.

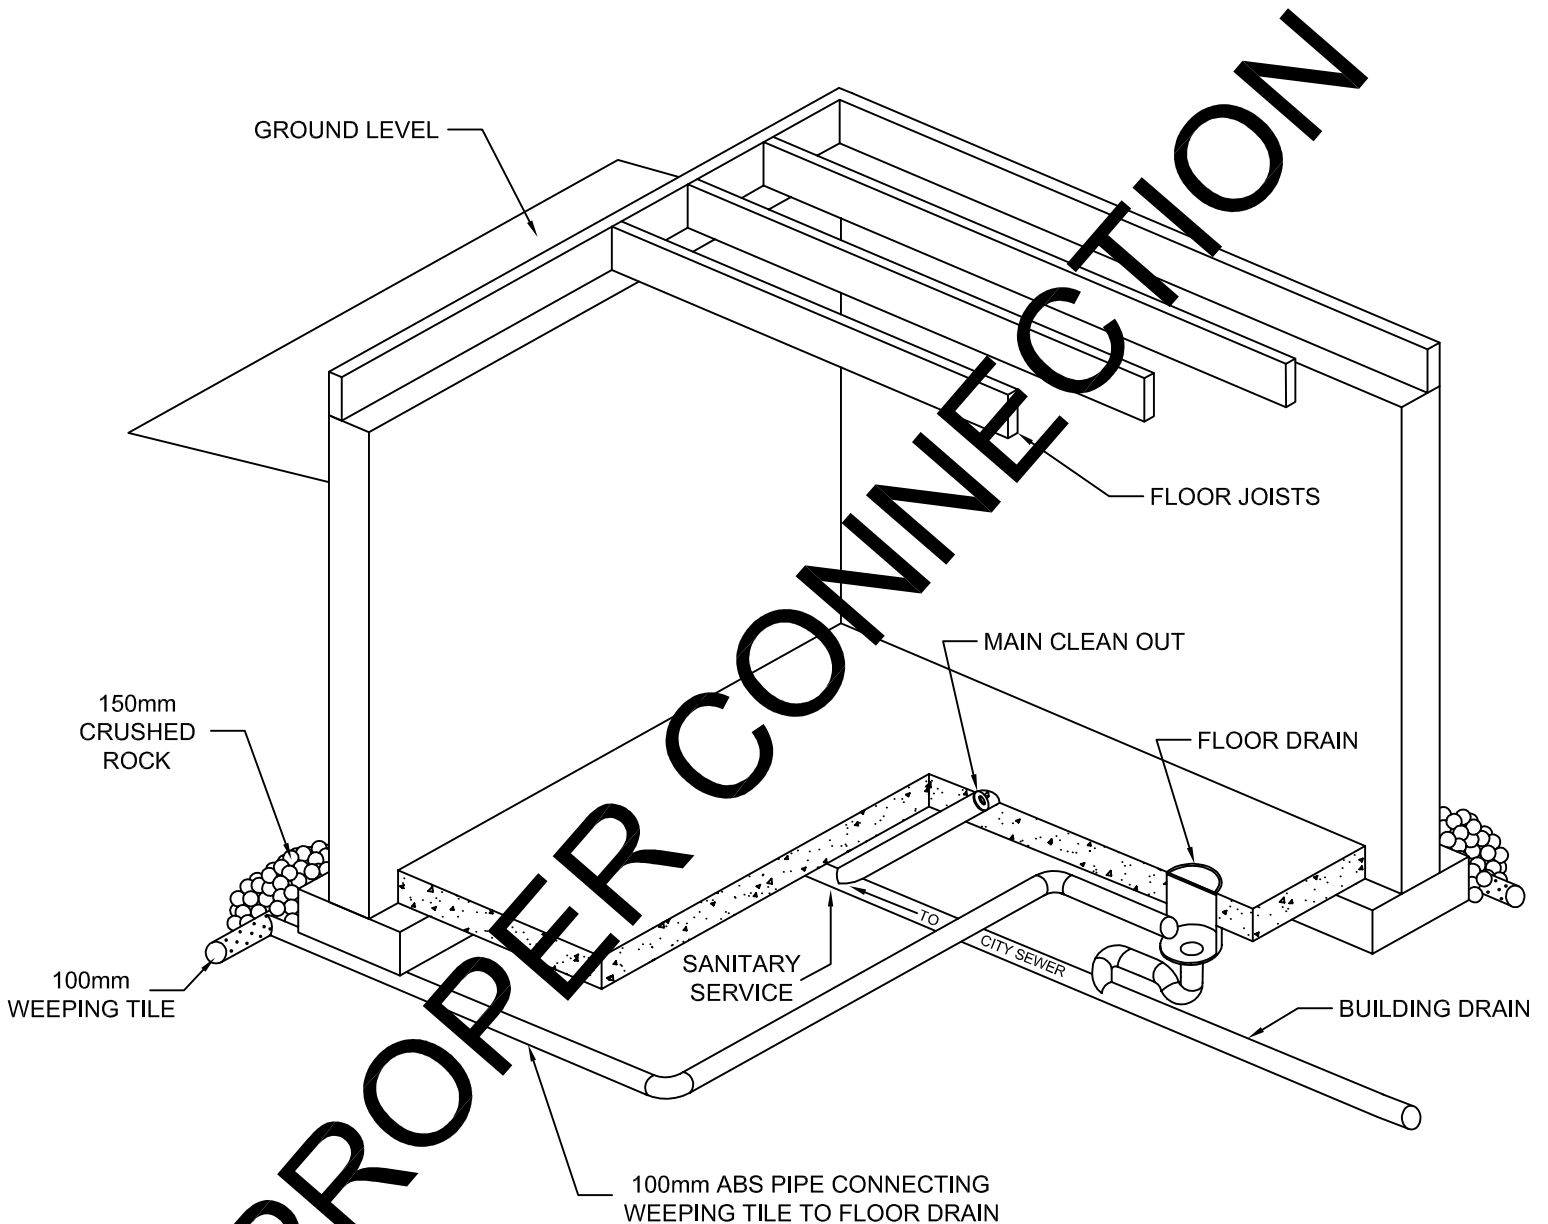

**This drawing is for CONCEPTUAL PURPOSES ONLY. Actual plumbing may vary.
REFER TO THE NATIONAL BUILDING CODE SECTION 9.14.2 FOUNDATION DRAINAGE & 9.14.5.2 SUMP PITS.